



Wedge gate valve

DIN EN 1171 / DIN 3352
flange connection PN10, short pattern

**A-KFB
210**

Design:

Flanged connection according to DIN EN 1092

Compact design, short valve pattern

external, rising stem


Bolted bonnet

Special designs on request (ASME, GOST, ...)

stem seal	gland seal
sealing wedge	rigid wedge
operation	hand wheel / chain wheel / gearbox electric / pneumatic / hydraulic
operating temperature	-10°C ... +200°C
operating pressure	max 10 bar (temperature dependent)
pressure test	EN 12266 Part 1 and 2 15 bar water, 6 bar air
face to face length	EN 558-1 row 14 (previously DIN 3202 F4)
flange connection	DIN EN 1092-1 Form B1 PN10 flange pattern PN6 on request



example image




Detail: rigid wedge

Materials:

Body	GG25 / GJL 250 (0.6025)
stem	1.4021 / X20Cr13
seal	1.4021 / X20Cr13
stem seal	graphite
bonnet seal	graphite

Dimensions:

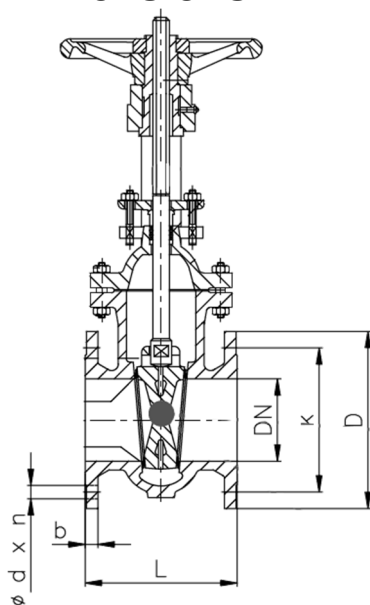

DN	D	k	b	n-ød	L
40	150	110	18	4-18	140
50	165	125	18	4-18	150
65	185	145	18	8-18	170
80	200	160	20	8-18	180
100	220	180	20	8-18	190
125	250	210	22	8-18	200
150	285	240	22	8-22	210
200	340	295	24	8-22	230
250	395	350	26	12-22	250
300	445	400	26	12-22	270
350	505	460	26	16-22	290
400	565	515	26	16-26	310
450	615	565	28	20-26	330
500	670	620	28	20-26	350

Technical changes and errors reserved!

ACI Industriearmaturen GmbH
www.aci24.com • info@aci24.com
Version 2018-06-28