



Spray Device

Option

for circular circular sight glass fittings

SVI

Application:

For intermittent or continuous automatic cleaning of underside of sight port glass disc. Suitable for pressure and vacuum vessels subject to pressure test certification for all standard ratings and use in explosion hazardous as well as non-hazardous areas.

Installation:

Pressure tight screwed gland nozzles, as supplied, pass through clearance hole in cover flange and tapped hole in base flange of sight glass assembly.

Operating conditions:


Corresponding to Sight Glass Rating.

Combination with other features:

Can be combined simultaneously with lighting and wiper. Care must, however, be taken that max. permissible operating temperature and resistance to temperature cycling for the relevant glass disc are considered.

Parts and Materials

Pos.	Part	Material
1.	Connection nozzle	1.4571
2.	seals	PTFE
3.	locknut	A4
4.	Spray head	1.4571

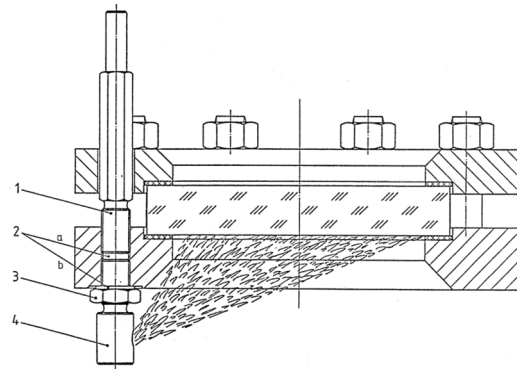

Ordering Information

If ordering in combination with complete sight glass assembly, please indicate type of fitting and intended form of installation:

- Sight glass fitting (DN/PN), materials
- dimensions and type of sight glass disc (borosilicate/sodalime glass)

Technical changes and errors reserved!

ACI Industriearmaturen GmbH
www.aci24.com • info@aci24.com
Version 2017-07-17